

Bello Alps Collection



48x48 NAT RECT | #204280E
 48x48 POL RECT | #204288E
 24x48 NAT RECT | #204278E
 24x48 POL RECT | #204282E
 12x24 NAT RECT | #80189ET
 12x24 POL RECT | #80192ET

24x48 NAT RECT | #204119E

Single Bullnose
 3x12 NAT RECT | #80152ET
 3x12 POL RECT | #80190ET

TECH DATA

Finish	Freeze Resistant	Shade Variation	Color Body	Water Absorption	Stain Resistant	DCOF AcuTest	Chemical Resistant	Breaking Strength	Abrasion Resistance
NAT	Resistant	V3	√ 12x24	≤ 0.5%	Class A	≥ 0.42	Class A	≥ 275lbf	III
POL	Resistant	V3	√ 12x24	≤ 0.5%	Class E	< 0.42	Class E	≥ 275lbf	II
NAT Stream	Resistant	V2	N/A	≤ 0.5%	Class A	N/A	Class A	≥ 275lbf	III

PACKING INFO


PRODUCT SIZE INCHES	ACTUAL SIZE	THICKNESS MM	LBS/ CARTON	PCS/ CARTON	SF/ CARTON	SF/ PALLET	LBS/ PALLET	CARTON/ PALLET	NUMBER OF FACES
2x2 Mosaic	11.87 x 11.87	10.00	39.99	10	10.00	360.00	1,484.09	36	10
8x8 Hexa	7.87 x 7.87	8.00	13.23	10	3.23	445.46	1,825.43	138	60
12x24	11.70 x 23.50	10.00	55.32	6	11.46	641.76	3,097.90	56	25
24x48 Stream	23.56 x 48	10.20	75.69	2	15.39	430.83	2,119.30	28	8
24x48	23.56 x 48	9.00	67.24	2	15.39	492.38	2,151.71	32	25
48x48	47.19 x 47.19	9.00	69.42	1	15.39	646.25	2,915.66	42	15

For reference only.

AREAS OF USAGE


Classification	Reference Category	Suitable
Interior, Dry	ID	√
Interior, Wet	IW	√ NAT
Interior, Wet Plus	IW+	√ 2x2 NAT
Exterior, Wet	EW	
Oils/Greases	O/G	

FORMATS

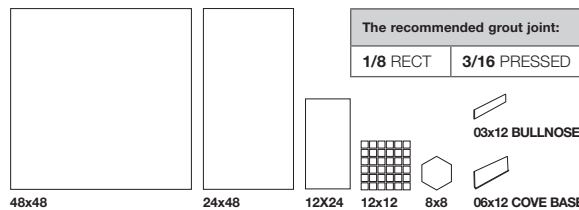

GROUT JOINT

The recommended grout joint:	
1/8 RECT	3/16 PRESSED



TORONTO
 115 Carnarvon Street
 Toronto, ON M6M 3C9
 T 416 413 9008
 F 416 413 9652

TROY
 1700 Stutz Drive, Ste
 122
 Troy, MI 48084
 T 248 643 6520
 F 248 643 6523

Please note, all specifications have been supplied by the manufacturer and are subject to change.

Email: mail@cercantile.com
 Website: www.cercantile.com